


# Rodamiento de agujas RNAF8010030-IKO

RNAF8010030-IKO

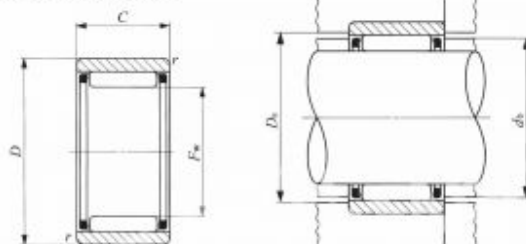

| Shut<br>dia.<br>mm | Identification number | Mass<br>(Ref.)<br>g | Boundary dimensions mm |     |    |                    | Standard mounting<br>dimensions mm |                        |                        | Basic dynamic<br>load rating<br>C <sub>N</sub> | Basic static<br>load rating<br>C <sub>0</sub> |
|--------------------|-----------------------|---------------------|------------------------|-----|----|--------------------|------------------------------------|------------------------|------------------------|------------------------------------------------|-----------------------------------------------|
|                    |                       |                     | F <sub>w</sub>         | D   | C  | r <sub>s</sub> min | d <sub>s</sub>                     | D <sub>s</sub><br>Max. | D <sub>s</sub><br>Min. | C <sub>N</sub>                                 | C <sub>0</sub>                                |
| 80                 | RNAF 8010030          | 560                 | 80                     | 100 | 30 | 1.5                | 87                                 | 92                     | 81                     | 65 000                                         | 153 000                                       |
|                    | RNAFW 8010060         | 1 120               | 80                     | 100 | 60 | 1.5                | 87                                 | 92                     | 81                     | 111 000                                        | 306 000                                       |

| Allowable<br>rotational<br>speed (°C) |
|---------------------------------------|
| rpm                                   |
| 6 000                                 |
| 6 000                                 |



**Rodamiento de agujas RNAF8010030-IKO**

| Caractéristique            | Valeur     |
|----------------------------|------------|
| d - Diámetro interior (mm) | 80         |
| D - Diámetro exterior (mm) | 100        |
| C - Espesor (mm)           | 30         |
| Marca                      | IKO        |
| Tipo del rodamiento        | De agujas  |
| Tipo de sellado            | No estanco |
| Tipo de jaula              | Acero      |
| Rodamiento serie           | RNAF       |
| Unidad de venta            | pieza      |

