


Rodamiento de agujas NAFW152826-IKO

NAFW152826-IKO

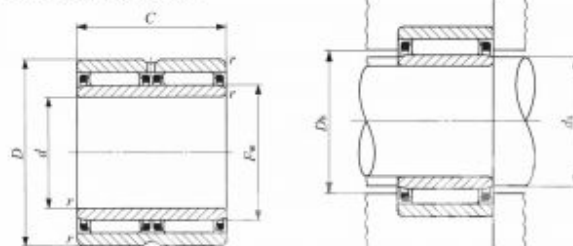

Shell	Identification number	Mod. (ref.)	Boundary dimensions - mm					Standard mounting dimensions - mm				
mm		g	d	D	C	$r_{s\max}$ (°)	F_w	d_b	D_b Max.	d_b Min.	D_b Max.	D_b
15	NAF 152813	38.5	15	28	13	0.3	20	23.6	26	17	19	20.6
	NAFW 152826	77.5	15	28	26	0.3	20	23.6	26	17	19	20.6
	NAF 153212	80.5	15	32	12	0.3	20	25.4	30	17	19	20.6

Ball-bearing load rating C	Basic static load rating C_0	Allowable rotational speed ⁽²⁾	Assembled inner ring
N	N	rpm	
9 590	13 500	25 000	LRT 152813
16 400	27 100	25 000	LRT 152826
12 400	14 300	25 000	LRT 152812



Rodamiento de agujas NAFW152826-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	15
D - Diámetro exterior (mm)	28
C - Espesor (mm)	26
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

