


Rodamiento de agujas NAFW203526-IKO

NAFW203526-IKO

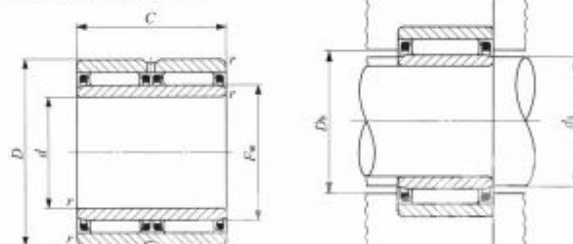

Shell	Identification number	Mod. (Ref.)	Boundary dimensions mm						Standard mounting dimensions mm				
mm		g	d	D	C	r_{smax}	r_{rmax}	d_b	D_h Max.	Min.	d_h Max.	D_h	
20	NAFW 203517	74	20	35	17	0.3	25	29.5	33	22	24	25.6	
	NAFW 203526	114	20	35	26	0.3	25	29.5	33	22	24	25.6	
	NAFW 203716	79	20	37	16	0.3	25	30.4	35	22	24	25.6	
	NAFW 203732	158	20	37	32	0.3	25	30.4	35	22	24	25.6	

Bearing load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
C	C_0	rpm	
17 300	26 600	20 000	LRT 202517
22 400	37 200	20 000	LRT 202526
19 400	24 500	20 000	LRT 202516
33 200	49 000	20 000	LRT 202532



Rodamiento de agujas NAFW203526-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	35
C - Espesor (mm)	26
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

