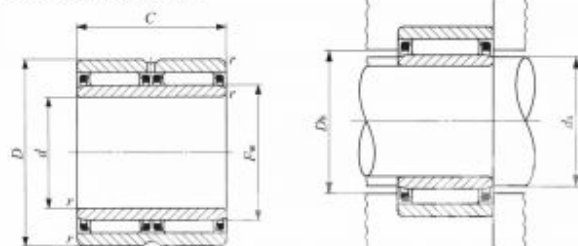


Rodamiento de agujas NAFW254232-IKO

NAFW254232-IKO


**LE BON
ROULEMENT**


Shell size	Identification number	Mod. (ref.)	Boundary dimensions - mm						Standard mounting dimensions - mm					
mm		g	d	D	C	r _s (°)	F _w	d _b	D _h Max.	d _h Min.	D _h Max.	D _b		
25	NAF 254017	87.5	25	40	17	0.3	30	34.5	38	27	29	30.6		
	NAFW 254026	135	25	40	26	0.3	30	34.5	38	27	29	30.6		
	NAF 254216	94	25	42	16	0.3	30	35.4	40	27	29	30.6		
	NAFW 254232	186	25	42	32	0.3	30	35.4	40	27	29	30.6		

Ball-bearing load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	Assembled inner ring
N	N	rpm	
18 700	31 100	17 000	LRT 253017
24 200	43 400	17 000	LRT 253026
20 800	28 400	17 000	LRT 253016
35 700	56 800	17 000	LRT 253032



Rodamiento de agujas NAFW254232-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	42
C - Espesor (mm)	32
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

