


Rodamiento de agujas NAFW355034-IKO

NAFW355034-IKO

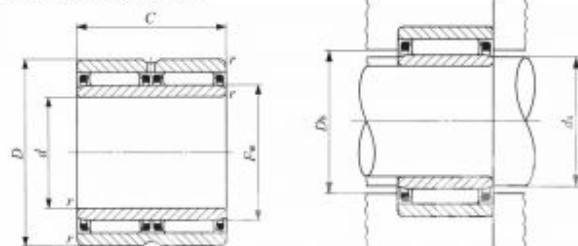

Shell	Identification number	Mass (ref.)	Boundary dimensions - mm						Standard mounting dimensions - mm				
mm		g	d	D	C	r_{smax}	r_{wmax}	d_b	D_h Max.	Min.	d_h Max.	D_b	
35	NAFW 355017	115	35	50	17	0.3	40	43.5	48	37	39	40.8	
	NAFW 355034	230	35	50	34	0.3	40	43.5	48	37	39	40.8	
	NAFW 355520	186	35	55	29	0.3	40	45.2	53	37	39	40.8	
	NAFW 355540	375	35	55	40	0.3	40	45.2	53	37	39	40.8	

Ball-type load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽¹⁾	Assembled inner ring
N	N	rpm	
22 200	42 700	12 000	LRT 354017
38 000	85 400	12 000	LRT 354034
31 400	48 000	12 000	LRT 354020
53 900	96 000	12 000	LRT 354040



Rodamiento de agujas NAFW355034-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	50
C - Espesor (mm)	34
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

