


Rodamiento de agujas NAFW355540-IKO

NAFW355540-IKO

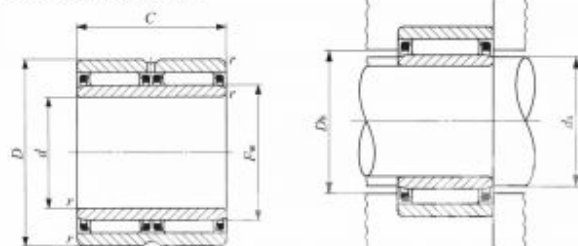

Shell	Identification number	Mod. (ref.)	Boundary dimensions mm						Standard mounting dimensions mm					
mm		g	d	D	C	$r_{s\max}$	$r_{w\max}$	d_h	D_h Max.	d_h Min.	d_h Max.	D_h		
35	NAFW 355017	115	35	50	17	0.3	40	43.5	48	37	39	40.8		
	NAFW 355034	230	35	50	34	0.3	40	43.5	48	37	39	40.8		
	NAFW 355520	186	35	55	29	0.3	40	45.2	53	37	39	40.8		
	NAFW 355540	375	35	55	40	0.3	40	45.2	53	37	39	40.8		

Ball-type	Basic static	Allowable	Assembled
load rating	load rating	rotational	inner ring
C	C_0	speed ⁽²⁾	
N	N	rpm	
22 200	42 700	12 000	LRT 354017
38 000	85 400	12 000	LRT 354034
31 400	48 000	12 000	LRT 354020
53 900	98 000	12 000	LRT 354040



Rodamiento de agujas NAFW355540-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	55
C - Espesor (mm)	40
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

