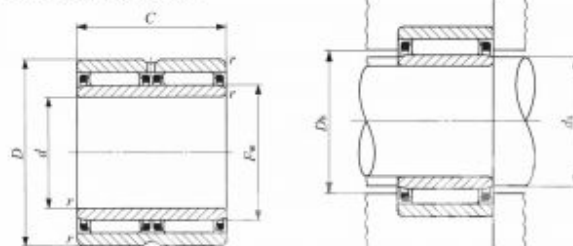


Rodamiento de agujas NAFW457240-IKO

NAFW457240-IKO


**LE BON
ROULEMENT**


Shell	Identification number	Mass (ref.)	Boundary dimensions mm					Standard mounting dimensions mm				
mm		g	d	D	C	r_{smax}	r_{wmax}	d_h	D_h Max.	d_h Min.	d_h Max.	D_h
45	NAFW 456220	195	45	62	20	0.3	50	54.2	60	47	49	50.8
	NAFW 456240	390	45	62	40	0.3	50	54.2	60	47	49	50.8
	NAFW 457220	340	45	72	20	1	55	60.9	67	50	54	55.8
	NAFW 457240	685	45	72	40	1	55	60.9	67	50	54	55.8

Ball-type	Basic static	Allowable	Assembled
load rating	load rating	rotational	inner ring
C	C_0	speed ⁽²⁾	
N	N	rpm	
27 100	59 300	10 000	LRT 455020
46 400	119 000	10 000	LRT 455040
37 400	66 400	9 000	LRT 455520
64 100	133 000	9 000	LRT 455540



Rodamiento de agujas NAFW457240-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	45
D - Diámetro exterior (mm)	72
C - Espesor (mm)	40
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

