


Rodamiento de agujas NAFW7010060-IKO

NAFW7010060-IKO

LE BON ROULEMENT

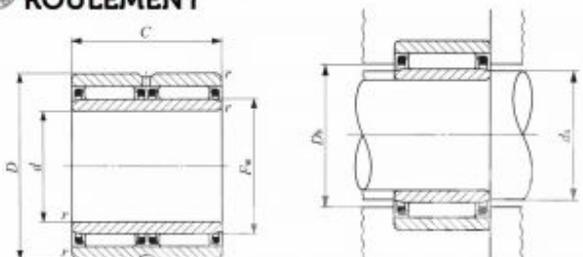

Shell Size mm	Identification number	Mod. (Ref.)	Boundary dimensions mm					Standard mounting dimensions mm				
			g	d	D	C	r _s mm ^(*)	F _w	d _s	D _s Max.	d _s Min.	D _s Max.
70	NAF 7010030	S35	70	100	30	1.5	30	87	92	78	78.5	81
	NAFW 7010060	1 680	70	100	30	1.5	30	87	92	78	78.5	81

Ball-type load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾	Assembled inner ring
N	N	rpm	
65 000	153 000	6 000	LRT 708030-1
111 000	306 000	6 000	LRT 708060



Rodamiento de agujas NAFW7010060-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	70
D - Diámetro exterior (mm)	100
C - Espesor (mm)	60
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	NAF
Unidad de venta	pieza

