


Rodillo de apoyo NART8-V-R-IKO

NART8-V-R-IKO



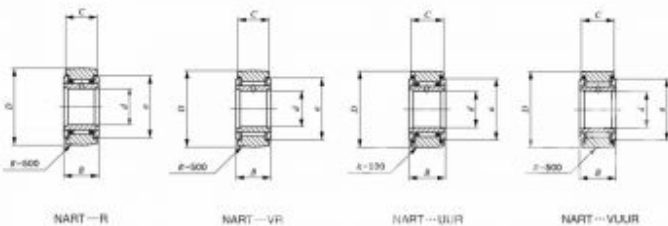

NART-RNART-VRNART-UURNART-VUUR

Shaft dia. mm	Identification number				Mass (Ref.) g	
	Shield type Crowned outer ring		Sealed type Crowned outer ring			
	With cage	Full complement	With cage	Full complement		
8	NART 8 R	NART 8 VR	NART 8 UUR	NART 8 VUUR	41.5 42.5	

Boundary dimensions mm					Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
d	D	B	C	a			
8	24	15	14	17.5	5 640	5 900	5 900
8	24	15	14	17.5	11 800	15 600	15 600



Rodillo de apoyo NART8-V-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	8
D - Diámetro exterior (mm)	24
C - Espesor (mm)	15
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NART
Unidad de venta	pieza

