


Rodillo de apoyo NART10-R-IKO

NART10-R-IKO



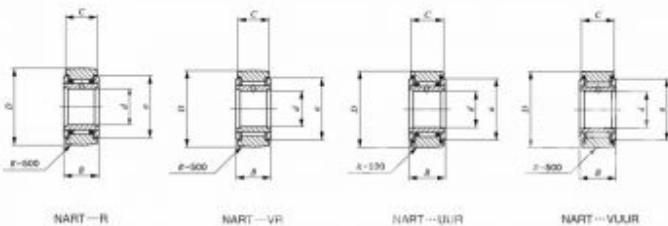

Shaft dia. mm	Identification number				Mass (Ref.) g	
	Shield type Crowned outer ring		Sealed type Crowned outer ring			
	With cage	Full complement	With cage	Full complement		
10	NART 10 R	—	NART 10 UUR	—	64.5	
	—	NART 10 VR	—	NART 10 VUUR	66.5	

Boundary dimensions mm					Basic dynamic load rating C	Basic static load rating C ₀	Maximum allowable static load
d	D	B	C	a	N	N	N
10	30	15	14	23.5	8 030	7 540	7 540
10	30	15	14	23.5	15 600	18 100	17 500



Rodillo de apoyo NART10-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	10
D - Diámetro exterior (mm)	30
C - Espesor (mm)	15
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NART
Unidad de venta	pieza

