


Rodillo de apoyo NART6-V-UU-R-IKO

NART6-V-UU-R-IKO



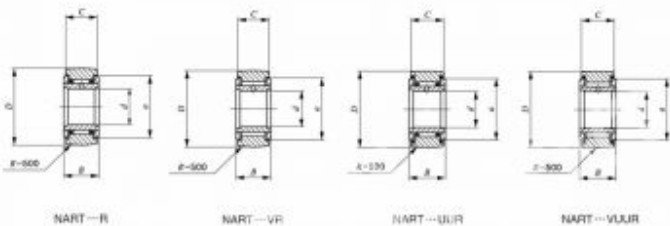

NART6-R NART6-VR NART6-UUR NART6-VUUR

Shaft dia. mm	Identification number				Mass (Ref.) g	
	Shield type Crowned outer ring		Sealed type Crowned outer ring			
	With cage	Full complement	With cage	Full complement		
6	NART 6 R	NART 6 VR	NART 6 UUR	NART 6 VUUR	20.5 21.5	

Boundary dimensions mm					Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
d	D	B	C	a			
6	19	12	11	14	4 250	4 740	4 740
6	19	12	11	14	7 690	10 300	10 300



Rodillo de apoyo NART6-V-UU-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	6
D - Diámetro exterior (mm)	19
C - Espesor (mm)	12
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NART
Unidad de venta	pieza

