


Rodillo de apoyo NATR5-SKF

NATR5-SKF

LE BON ROULEMENT

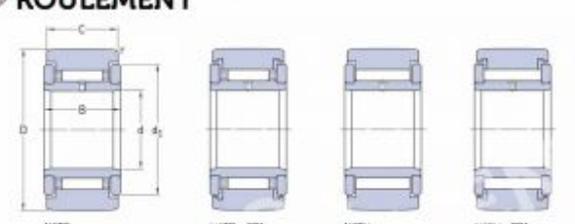

| Dimensions | | | | | | | Mass | Designation |
|------------|---|----|----|----------------|------|-----------------|-------|-------------|
| D | d | C | B | d ₁ | F | F ₁₂ | | |
| mm | | | | | | | kg | — |
| 56 | 5 | 11 | 12 | 12 | 0.15 | — | 0.014 | NATR 5 |
| | 5 | 11 | 12 | 12 | 0.15 | — | 0.014 | NATR 5 PPA |
| | 5 | 11 | 12 | 12 | 0.15 | — | 0.015 | NATV 5 |
| | 5 | 11 | 12 | 12 | 0.15 | — | 0.015 | NATV 5 PPA |

| Designation | Basic load ratings | | Fatigue load limit | Maximum radial forces | | Limiting speed |
|-------------|--------------------|----------------|--------------------|-----------------------|-----------------|----------------|
| | dynamic | static | | dynamic | static | |
| — | C | C ₀ | P ₀ | F _r | F _{0r} | rpm |
| NATR 5 | 3.14 | 3.2 | 0.345 | 2.9 | 4.15 | 6 000 |
| NATR 5 PPA | 3.14 | 3.2 | 0.345 | 2.9 | 4.15 | 6 000 |
| NATV 5 | 4.73 | 4.55 | 0.72 | 4.05 | 5.7 | 4 300 |
| NATV 5 PPA | 4.73 | 4.55 | 0.72 | 4.05 | 5.7 | 4 300 |



Rodillo de apoyo NATR5-SKF

| Caractéristique | Valeur |
|----------------------------|----------------------------|
| d - Diámetro interior (mm) | 5 |
| D - Diámetro exterior (mm) | 16 |
| C - Espesor (mm) | 12 |
| Marca | SKF |
| Tipo del rodamiento | Rodillo de apoyo de agujas |
| Tipo de sellado | No estanco |
| Tipo de jaula | Acero |
| Especificaciones | Jaula exterior abombada |
| Rodamiento serie | NATR |
| Unidad de venta | pieza |

