


Rodillo de apoyo NATR8-X-PP-A-SKF

NATR8-X-PPA-SKF

LE BON ROULEMENT

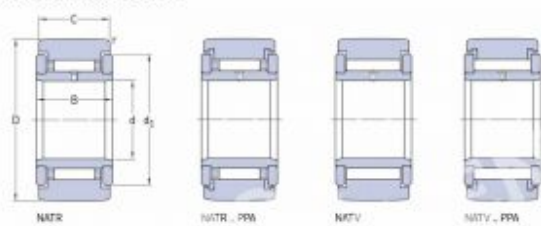

Dimensions							Mass	Designation
D	d	C	B	d ₂	F	F _{1,2}		
mm							kg	—
24	8	14	15	19	0,3	—	0,041	NATR 8
	8	14	15	19	0,3	—	0,041	NATR 8 PPA
	8	14	15	19	0,3	—	0,042	NATV 8
	8	14	15	19	0,3	—	0,042	NATV 8 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		rpm
NATR 8	5,28	6,1	0,695	5,2	7,35	5 000
NATR 8 PPA	5,28	6,1	0,695	5,2	7,35	5 000
NATV 8	7,48	11,4	1,12	7,35	10,4	3 600
NATV 8 PPA	7,48	11,4	1,12	7,35	10,4	3 600



Rodillo de apoyo NATR8-X-PP-A-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	8
D - Diámetro exterior (mm)	24
C - Espesor (mm)	15
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior plana
Rodamiento serie	NATR
Unidad de venta	pieza

