


# Rodillo de apoyo NATR20-X-PP-A-SKF

## NATR20-X-PPA-SKF

**LE BON ROULEMENT**

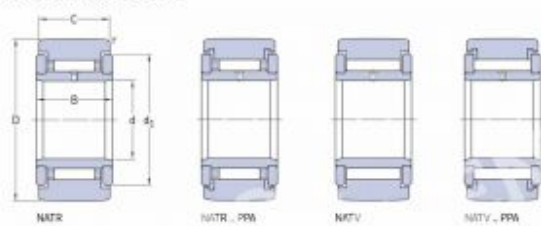

| Dimensions |    |    |    |                |   |                  | Mass | Designation |
|------------|----|----|----|----------------|---|------------------|------|-------------|
| D          | d  | C  | B  | d <sub>2</sub> | F | F <sub>1,2</sub> |      |             |
| mm         |    |    |    |                |   |                  | kg   | —           |
| 47         | 20 | 24 | 25 | 37             | 1 | —                | 0,25 | NATR 20     |
|            | 20 | 24 | 25 | 37             | 1 | —                | 0,25 | NATR 20 PPA |
|            | 20 | 24 | 25 | 37             | 1 | —                | 0,25 | NATV 20     |
|            | 20 | 24 | 25 | 37             | 1 | —                | 0,25 | NATV 20 PPA |

| Designation | Basic load ratings |                          | Fatigue load limit | Maximum radial forces     |                          | Limiting speed |
|-------------|--------------------|--------------------------|--------------------|---------------------------|--------------------------|----------------|
|             | dynamic<br>C       | static<br>C <sub>0</sub> |                    | dynamic<br>F <sub>r</sub> | static<br>F <sub>0</sub> |                |
| —           | kN                 |                          | kN                 | kN                        |                          | rpm            |
| NATR 20     | 34,7               | 24,5                     | 2,9                | 23,6                      | 33,5                     | 3 000          |
| NATR 20 PPA | 34,7               | 24,5                     | 2,9                | 23,6                      | 33,5                     | 3 000          |
| NATV 20     | 39,4               | 43,5                     | 5                  | 30,5                      | 43                       | 1 900          |
| NATV 20 PPA | 39,4               | 43,5                     | 5                  | 30,5                      | 43                       | 1 900          |



**Rodillo de apoyo NATR20-X-PP-A-SKF**

| Caractéristique            | Valeur                                           |
|----------------------------|--------------------------------------------------|
| d - Diámetro interior (mm) | 20                                               |
| D - Diámetro exterior (mm) | 47                                               |
| C - Espesor (mm)           | 25                                               |
| Marca                      | SKF                                              |
| Tipo del rodamiento        | Rodillo de apoyo de agujas                       |
| Tipo de sellado            | Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE) |
| Tipo de jaula              | Acero                                            |
| Especificaciones           | Jaula exterior plana                             |
| Rodamiento serie           | NATR                                             |
| Unidad de venta            | pieza                                            |

