


Rodillo de apoyo NATR25-SKF

NATR25-SKF



LE BON
ROULEMENT

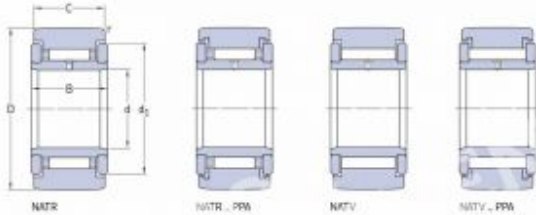

Dimensions						Mass	Designation
D	d	C	B	d ₂	F _{min}	F _{1,2}	
mm					mm	mm	kg
S2	25	24	25	42	3	—	0,28
	25	24	25	42	3	—	0,28
	25	24	25	42	1	—	0,29
	25	24	25	42	1	—	0,29

Designation	Basic load ratings		Fatigue	Maximum		Limiting
	C	C ₀	load limit	radial forces	static	
	kN		kN	kN	kN	rpm
NATR 25	34,7	25,5	3,3	21,6	31	2 400
NATR 25 PPA	34,7	25,5	3,3	21,6	31	2 400
NATV 25	39,8	44	5,1	28,5	40,5	1 600
NATV 25 PPA	39,8	44	5,3	28,5	40,5	1 600



Rodillo de apoyo NATR25-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	52
C - Espesor (mm)	25
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATR
Unidad de venta	pieza

