


Rodillo de apoyo NATR30-SKF

NATR30-SKF



LE BON
ROULEMENT

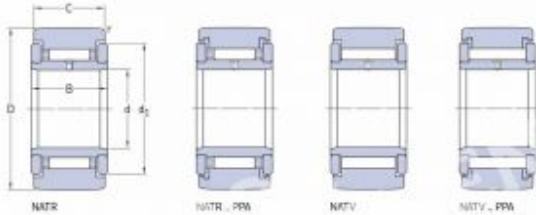

NATR NATR - PM NATV NATV - PM

Dimensions					Mass		Designation
D	d	C	B	d ₂	F _{min}	F _{1,2}	
mm					kg		—
62	30	28	29	51	1	—	NATR 30
	30	28	29	51	1	—	NATR 30 PPA
	30	28	29	51	1	—	NATV 30
	30	28	29	51	1	—	NATV 30 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	C	C ₀	P ₀	F _r	F ₀	
—	kN		kN	kN	kN	rpm
NATR 30	22,9	37,5	4,55	26,5	38	1 800
NATR 30 PPA	22,9	37,5	4,55	26,5	38	1 800
NATV 30	25,2	62	7,65	34,5	49	1 400
NATV 30 PPA	29,2	62	7,65	34,5	49	1 400



Rodillo de apoyo NATR30-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	62
C - Espesor (mm)	29
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATR
Unidad de venta	pieza

