


Rodillo de apoyo NATR40-PP-SKF

NATR40-PPA-SKF

 **LE BON
ROULEMENT**

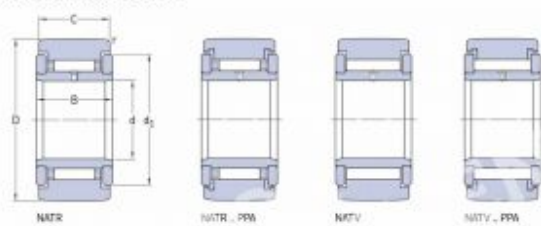

Dimensions							Mass	Designation
D	d	C	B	d ₁	F	F _{1,2}		
mm							kg	—
80	40	30	32	66	1.1	—	0.81	NATR 40 PPA
	40	30	32	66	1.1	—	0.89	NATV 40 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		rpm
NATR 40 PPA	31.9	57	7.1	41.5	58.5	1 500
NATV 40 PPA	39.1	88	11	51	73.5	950



Rodillo de apoyo NATR40-PP-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	80
C - Espesor (mm)	32
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATR
Unidad de venta	pieza

