


## Rodillo de apoyo NATV8-X-PP-A-SKF

NATV8-X-PPA-SKF

 **LE BON  
ROULEMENT**

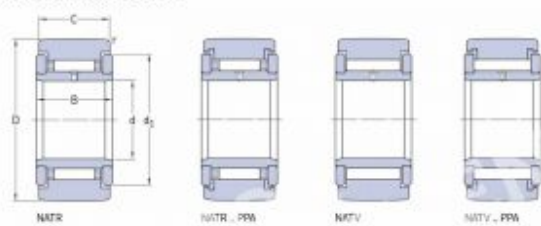

| Dimensions |   |    |    |                |         |                        | Mass  | Designation |
|------------|---|----|----|----------------|---------|------------------------|-------|-------------|
| D          | d | C  | B  | d <sub>2</sub> | F<br>mm | F <sub>1,2</sub><br>mm | kg    | —           |
| <b>mm</b>  |   |    |    |                |         |                        |       |             |
| 24         | 8 | 14 | 15 | 19             | 0,3     | —                      | 0,041 | NATR 8      |
|            | 8 | 14 | 15 | 19             | 0,3     | —                      | 0,041 | NATR 8 PPA  |
|            | 8 | 14 | 15 | 19             | 0,3     | —                      | 0,042 | NATV 8      |
|            | 8 | 14 | 15 | 19             | 0,3     | —                      | 0,042 | NATV 8 PPA  |

| Designation | Basic load ratings |                | Fatigue<br>load limit<br>P <sub>0</sub> | Maximum<br>radial forces |                | Limiting<br>speed<br>n <sub>lim</sub> |
|-------------|--------------------|----------------|-----------------------------------------|--------------------------|----------------|---------------------------------------|
|             | C                  | C <sub>0</sub> |                                         | F <sub>r</sub>           | F <sub>0</sub> |                                       |
| —           | kN                 |                | kN                                      | kN                       |                | rpm                                   |
| NATR 8      | 5,28               | 6,1            | 0,695                                   | 5,2                      | 7,35           | 5 000                                 |
| NATR 8 PPA  | 5,28               | 6,1            | 0,695                                   | 5,2                      | 7,35           | 5 000                                 |
| NATV 8      | 7,48               | 11,4           | 1,12                                    | 7,35                     | 10,4           | 3 600                                 |
| NATV 8 PPA  | 7,48               | 11,4           | 1,12                                    | 7,35                     | 10,4           | 3 600                                 |



**Rodillo de apoyo NATV8-X-PP-A-SKF**

| Caractéristique            | Valeur                                           |
|----------------------------|--------------------------------------------------|
| d - Diámetro interior (mm) | 8                                                |
| D - Diámetro exterior (mm) | 24                                               |
| C - Espesor (mm)           | 15                                               |
| Marca                      | SKF                                              |
| Tipo del rodamiento        | Rodillo de apoyo de agujas                       |
| Tipo de sellado            | Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE) |
| Tipo de jaula              | Acero                                            |
| Especificaciones           | Jaula exterior plana                             |
| Rodamiento serie           | NATV                                             |
| Unidad de venta            | pieza                                            |

