


Rodillo de apoyo NATV10-X-PP-A-SKF

NATV10-X-PPA-SKF

 **LE BON
ROULEMENT**

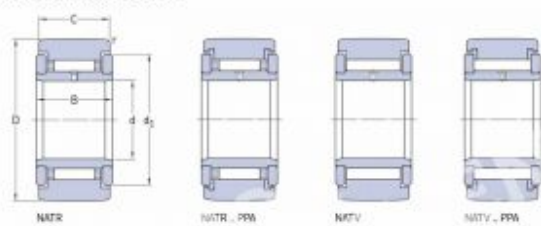

Dimensions							Mass	Designation
D	d	C	B	d ₂	F	F _{1,2}		
mm							kg	—
30	10	14	15	23	0,6	—	0,064	NATR 10
	10	14	15	23	0,6	—	0,064	NATR 10 PPA
	10	14	15	23	0,6	—	0,065	NATV 10
	10	14	15	23	0,6	—	0,065	NATV 10 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		r/min
NATR 10	6,64	8	0,88	7,8	11,2	4 800
NATR 10 PPA	6,64	8	0,88	7,8	11,2	4 800
NATV 10	8,97	14,6	1,66	11	15,6	3 200
NATV 10 PPA	8,97	14,6	1,66	11	15,6	3 200



Rodillo de apoyo NATV10-X-PP-A-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	10
D - Diámetro exterior (mm)	30
C - Espesor (mm)	15
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior plana
Rodamiento serie	NATV
Unidad de venta	pieza

