


## Rodillo de apoyo NATV15-X-PP-A-SKF NATV15-X-PPA-SKF

**LE BON ROULEMENT**

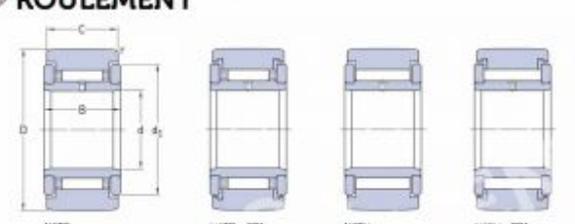

Dimensions							Mass	Designation
D	d	C	B	d <sub>1</sub>	F	F <sub>1,2</sub>		
mm							kg	-
35	15	18	19	27	0,6	-	0,1	NATR 15
	15	18	19	27	0,6	-	0,1	NATR 15 PPA
	15	18	19	27	0,6	-	0,11	NATV 15
	15	18	19	27	0,6	-	0,11	NATV 15 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic	static	P <sub>0</sub>	dynamic F <sub>r</sub>	static F <sub>0</sub>	
-	kN		kN	kN	kN	rpm
NATR 15	9,52	11,7	1,56	11,4	16,3	4 000
NATR 15 PPA	9,52	11,7	1,56	11,4	16,3	4 000
NATV 15	12,3	23,2	2,7	14,6	20,8	2 600
NATV 15 PPA	12,3	23,2	2,7	14,6	20,8	2 600



**Rodillo de apoyo NATV15-X-PP-A-SKF**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	15
D - Diámetro exterior (mm)	35
C - Espesor (mm)	19
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior plana
Rodamiento serie	NATV
Unidad de venta	pieza

