


Rodillo de apoyo NATV20-PP-SKF

NATV20-PPA-SKF

 **LE BON
ROULEMENT**

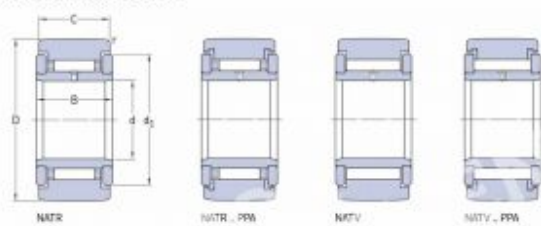

Dimensions							Mass	Designation
D	d	C	B	d ₂	F	F _{1,2}		
mm							kg	—
47	20	24	25	37	1	—	0,25	NATR 20
	20	24	25	37	1	—	0,25	NATR 20 PPA
	20	24	25	37	1	—	0,25	NATV 20
	20	24	25	37	1	—	0,25	NATV 20 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		rpm
NATR 20	34,7	24,5	2,9	23,6	33,5	3 000
NATR 20 PPA	34,7	24,5	2,9	23,6	33,5	3 000
NATV 20	39,4	43,5	5	30,5	43	1 900
NATV 20 PPA	39,4	43,5	5	30,5	43	1 900



Rodillo de apoyo NATV20-PP-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	47
C - Espesor (mm)	25
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATV
Unidad de venta	pieza

