


Rodillo de apoyo NATV30-X-PP-A-SKF

NATV30-X-PPA-SKF

LE BON ROULEMENT

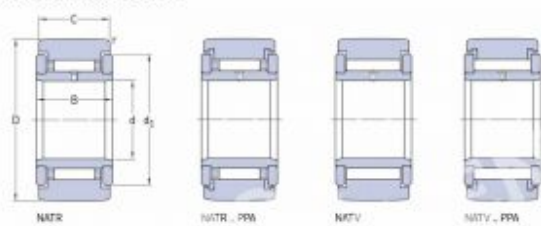

Dimensions							Mass	Designation
D	d	C	B	d ₂	F	F _{1,2}		
mm							kg	—
62	30	28	29	51	1	—	0.47	NATR 30
	30	28	29	51	1	—	0.47	NATR 30 PPA
	30	28	29	51	1	—	0.48	NATV 30
	30	28	29	51	1	—	0.48	NATV 30 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		rpm
NATR 30	22.9	37.5	4.55	26.5	38	1 800
NATR 30 PPA	22.9	37.5	4.55	26.5	38	1 800
NATV 30	25.2	62	7.65	34.5	49	1 400
NATV 30 PPA	29.2	62	7.65	34.5	49	1 400



Rodillo de apoyo NATV30-X-PP-A-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	62
C - Espesor (mm)	29
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior plana
Rodamiento serie	NATV
Unidad de venta	pieza

