


Rodillo de apoyo NATV35-PP-SKF NATV35-PPA-SKF

LE BON ROULEMENT

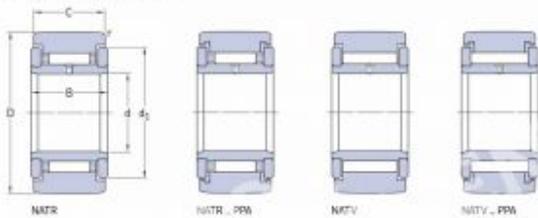

Dimensions							Mass	Designation
D	d	C	B	d ₁	F	F _{1,2}		
mm							kg	-
72	35	28	29	58	1.1	-	0.64	NATR 35 PPA
	35	28	29	58	1.1	-	0.65	NATV 35 PPA

Designation	Basic load ratings		Fatigue	Maximum		Limiting
	dynamic	static	load limit	radial forces	static	
-	C	C ₀	P ₀	F _r	F ₀	speed
-	kN		kN	kN	kN	rpm
NATR 35 PPA	24.6	43	5.3	33.5	48	1 600
NATV 35 PPA	31.9	72	8.8	43	62	1 100



Rodillo de apoyo NATV35-PP-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	72
C - Espesor (mm)	29
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATV
Unidad de venta	pieza

