


Rodillo de apoyo NATV50-PP-SKF

NATV50-PPA-SKF

 **LE BON
ROULEMENT**

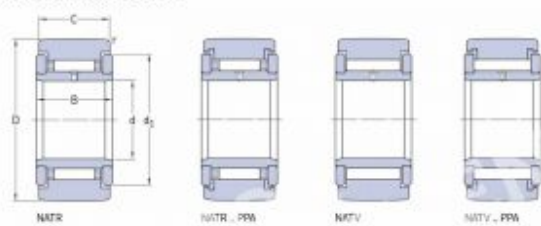

Dimensions							Mass	Designation
D	d	C	B	d ₂	F	F _{1,2}		
mm							kg	—
90	50	30	32	76	1,1	—	0,96	NATR 50 PPA
	50	30	32	76	1,1	—	0,99	NATV 50 PPA

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic C	static C ₀		dynamic F _r	static F ₀	
—	kN		kN	kN		rpm
NATR 50 PPA	30,8	58,5	7,2	40	57	1 200
NATV 50 PPA	39,1	93	11,8	50	72	850



Rodillo de apoyo NATV50-PP-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	90
C - Espesor (mm)	32
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NATV
Unidad de venta	pieza

