FICHE TECHNIQUE

Rodamiento de agujas NA2204-XLL-3AS-NTN

NA2204-XLL-3AS-NTN

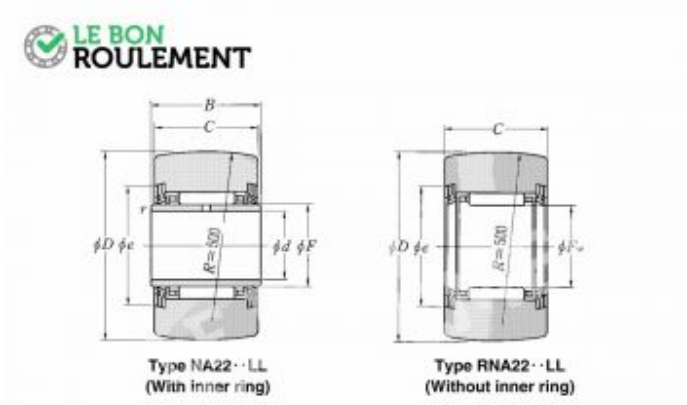

Boundary dimensions								Basic load ratings dynamic N	Basic load ratings static N	Basic load ratings dynamic kgf	Basic load ratings static kgf	Load ratings of truck N	Load ratings of truck kgf
47	18	17.8	20	25 $^{+0.033}_{+0.020}$	33	25	0.3	16 900	22 900	1 730	2 340	4 700	14 800	480	1 510

Limiting speeds r/min grease	Bearing numbers Type NA22··LL	Bearing numbers Type RNA22··LL	Mass (approx.) kg Type NA22··LL	Mass (approx.) kg Type RNA22··LL
6 000	NA2204LL	RNA2204LL	0.176	0.152

Commander sur El Mejor Rodamiento

Contacter le service client

FICHE TECHNIQUE

Rodamiento de agujas NA2204-XLL-3AS-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	47
C - Espesor (mm)	18
Marca	NTN
Tipo del rodamiento	De agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior plana
Rodamiento serie	NA
Unidad de venta	pieza

Commander sur El Mejor Rodamiento

Contacter le service client