


Rodamiento de agujas NA22/8-2RS-SKF

NA22/8-2RS-SKF

 **LE BON ROULEMENT**

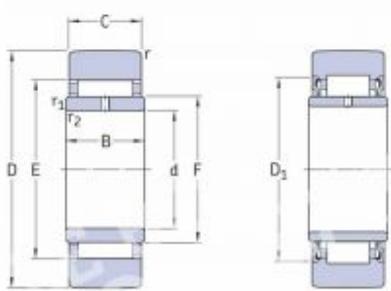

Dimensions										Mass	Designation
U	d	C	B	D ₁	F	E	r _{min}	r _{1,2} mm		kg	-
24	8	11.8	12	38	12	-	0.3	0.3		0.034	NA 22/8.2RS

Designation	Basic load ratings		Fatigue load limit	Maximum radial forces		Limiting speed
	dynamic	static		dynamic	static	
-	C	C ₀	P ₀	F _r	F _{sr}	rpm
NA 22/8.2RS	4.46	4.4	0.5	5	7.1	6 700



Rodamiento de agujas NA22/8-2RS-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	8
D - Diámetro exterior (mm)	24
C - Espesor (mm)	12
Marca	SKF
Tipo del rodamiento	De agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NA
Unidad de venta	pieza

