


Rodamiento de agujas NAST6-R-IKO

NAST6-R-IKO



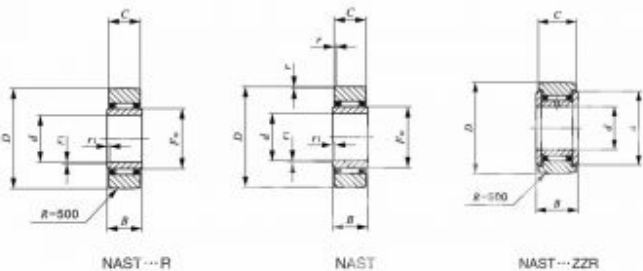

NAST...R

NAST

NAST...ZZR

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm								Basic dynamic load rating C N	Basic static load rating C ₀ N	Assembled inner ring				
	Open type			d	D	B	C	r _s max	r _{Da} max	F _{sw}	F _{sw}							
	Crowned outer ring	Cylindrical outer ring																
6	NAST 6 R	NAST 6	17.8	6	19	10	9.8	0.3	0.3	10	4 160	4 550	LRT 61010 S					

Shaft dia. mm	Identification number				Mass (Ref.) g	
	Shield type		Sealed type			
	Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring		
6	NAST 6 ZZR	NAST 6 ZZ	NAST 6 ZZUUR	NAST 6 ZZUU	24.5	



Rodamiento de agujas NAST6-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	6
D - Diámetro exterior (mm)	19
C - Espesor (mm)	10
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NAST
Unidad de venta	pieza

