


Rodamiento de agujas NAST10-IKO

NAST10-IKO



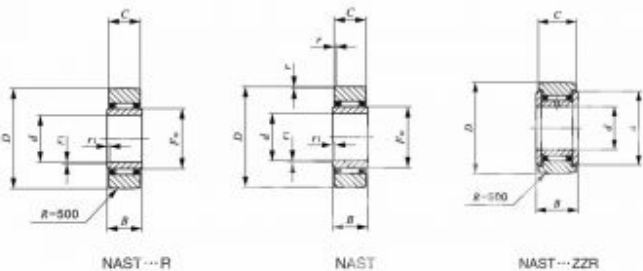

NAST...R                      NAST                      NAST...ZZR

| Shaft dia.<br>mm | Identification number |         | Mass<br>(Ref.)<br>g | Boundary dimensions<br>mm |    |    |      |                    |                     |                | Basic dynamic<br>load rating<br>C<br>N | Basic static<br>load rating<br>C <sub>0</sub><br>N | Assembled<br>inner ring |
|------------------|-----------------------|---------|---------------------|---------------------------|----|----|------|--------------------|---------------------|----------------|----------------------------------------|----------------------------------------------------|-------------------------|
|                  | Open type             |         |                     | d                         | D  | B  | C    | r <sub>s</sub> max | r <sub>Da</sub> max | K <sub>n</sub> |                                        |                                                    |                         |
| 10               | NAST 10 R             | NAST 10 | 49.5                | 10                        | 30 | 12 | 11.8 | 1                  | 0.3                 | 14             | 9 790                                  | 9 680                                              | LRT 101412 S            |

| Shaft dia.<br>mm | Identification number |                        |                    |                        | Mass<br>(Ref.)<br>g |
|------------------|-----------------------|------------------------|--------------------|------------------------|---------------------|
|                  | Shield type           |                        | Sealed type        |                        |                     |
|                  | Crowned outer ring    | Cylindrical outer ring | Crowned outer ring | Cylindrical outer ring |                     |
| 10               | NAST 10 ZZR           | NAST 10 ZZ             | NAST 10 ZZUUR      | NAST 10 ZZUU           | 65                  |



**Rodamiento de agujas NAST10-IKO**

| Caractéristique            | Valeur               |
|----------------------------|----------------------|
| d - Diámetro interior (mm) | 10                   |
| D - Diámetro exterior (mm) | 30                   |
| C - Espesor (mm)           | 12                   |
| Marca                      | IKO                  |
| Tipo del rodamiento        | De agujas            |
| Tipo de sellado            | No estanco           |
| Tipo de jaula              | Acero                |
| Especificaciones           | Jaula exterior plana |
| Rodamiento serie           | NAST                 |
| Unidad de venta            | pieza                |

