


Rodamiento de agujas NAST6-R-IKO

NAST6-ZZ-R-IKO



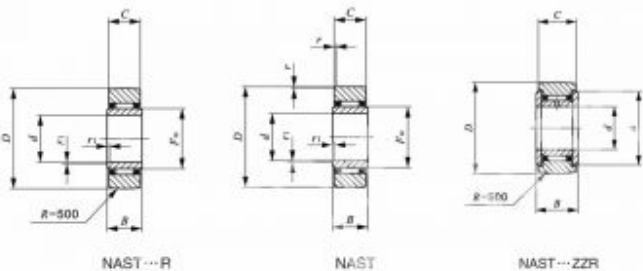

NAST...R NAST NAST...ZZR

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm								Basic dynamic load rating C N	Basic static load rating C ₀ N	Assembled inner ring
	Open type			d	D	B	C	r _s max	r ₁ max	r ₂ max	r ₃ max			
6	NAST 6 R	NAST 6	17.8	6	19	10	9.8	0.3	0.3	10		4 160	4 550	LRT 61010 S

Shaft dia. mm	Identification number				Mass (Ref.) g
	Shield type		Sealed type		
	Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring	
6	NAST 6 ZZR	NAST 6 ZZ	NAST 6 ZZUUR	NAST 6 ZZUU	24.5



Rodamiento de agujas NAST6-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	6
D - Diámetro exterior (mm)	19
C - Espesor (mm)	10
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	Doble estanco metal (ZZ, 2Z, 2RZ)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NAST
Unidad de venta	pieza

