


Rodamiento de agujas NAST10-R-IKO

NAST10-ZZ-R-IKO



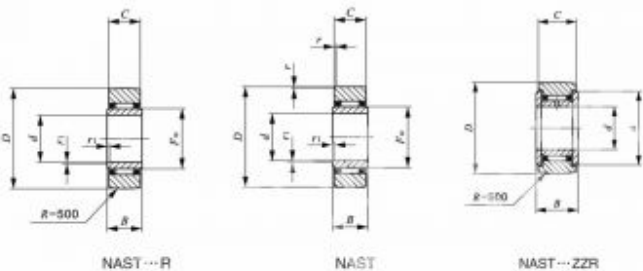

NAST...R NAST NAST...ZZR

Shaft dia. mm	Identification number		Mass (Ref.) g	Boundary dimensions mm								Basic dynamic load rating C N	Basic static load rating C ₀ N	Assembled inner ring
	Open type			d	D	B	C	r _s max	r ₁ max	r ₂ max	r ₃ max			
10	NAST 10 R	NAST 10	49.5	10	30	12	11.8	1	0.3	14		9 790	9 680	LRT 101412 S

Shaft dia. mm	Identification number				Mass (Ref.) g
	Shield type		Sealed type		
10	Crowned outer ring	Cylindrical outer ring	Crowned outer ring	Cylindrical outer ring	65
	NAST 10 ZZR	NAST 10 ZZ	NAST 10 ZZUUR	NAST 10 ZZUU	



Rodamiento de agujas NAST10-R-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	10
D - Diámetro exterior (mm)	30
C - Espesor (mm)	12
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	Doble estanco metal (ZZ, 2Z, 2RZ)
Tipo de jaula	Acero
Especificaciones	Jaula exterior abombada
Rodamiento serie	NAST
Unidad de venta	pieza

