


Rodamiento de agujas NKX10-TN

NKX10-TN



LE BON
ROULEMENT

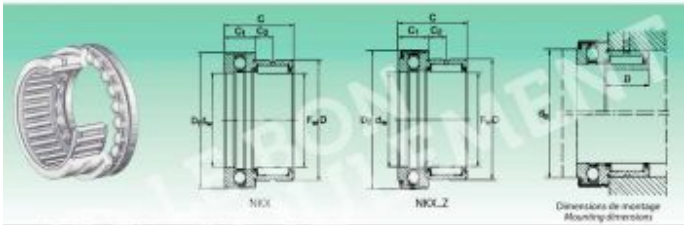

Diamètre interne (mm) Bore diameter (inch)	Série (Designation)	Dimensions (mm) Dimensions (inch)								Coefficients de charge (N) Load rating (lbf)				Vitesse limite Limiting speed			
		Sans cage Without cage	Avec cage With cage	Largeur Height	Largeur Height	F _d	D	D ₁	C	C ₁	Radial / Din / lbf	Radial / Din / lbf	Radial / Din / lbf	Radial / Din / lbf			
10	NKX10-TN	34	30	10	18	24.1	25.2	33	9	6.5	10	8 800	7 500	8 500	10 800	52 800	18.7



Rodamiento de agujas NKX10-TN

Caractéristique	Valeur
d - Diámetro interior (mm)	10
D - Diámetro exterior (mm)	19
C - Espesor (mm)	23
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con aceite
Rodamiento serie	NKX
Unidad de venta	pieza

