


Rodamiento de agujas NKX20

NKX20



Diamètre interne (mm) Bore diameter (mm)	Série (Designation)		Dimensions (mm) Dimensions (mm)							Coefficients de charge (N) Basic load rating (N)				Vitesse limite Limiting speed	
	Sans cage ou à cage en acier (Without cage or with steel cage)	Avec cage en acier (With steel cage)	Height mm mm	F ₀	D	D ₁ max	C	C ₁	C ₂	d _h	Radial / Din / Din	Radial / Din / Din	Radial / Din / Din	min / max	min / max
20	NKX 20	63 NKX 20 Z	80	30	55,1	36,2	30	18	10,5	28	15 800	22 500	13 900	25 800	7 500

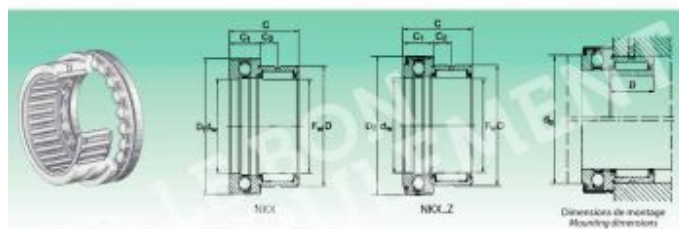

Rodamiento de agujas NKX20

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	30
C - Espesor (mm)	30
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NKX
Unidad de venta	pieza

