


Rodamiento de agujas NKX30

NKX30



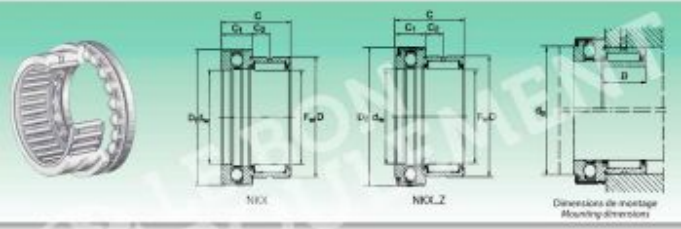

Diamètre interne Bore diameter (mm)	Série Designation	Dimensions (mm) Dimensions (mm)										Coefficients de charge (N) Load rating (N)				Vitesse limite Limiting speed		
		Sans cage Without cage		Avec cage With cage		F _{sw}	D	D ₁	C	C ₁	C ₂	Radial / Radial		Axial / Axial				
		Height (H)	Width (B)	Height (H)	Width (B)							Dyn / Dyn	Stat / Stat	Dyn / Dyn	Stat / Stat			
30	NKX 30	145	NKX 30 Z	145	30	42	47.1	45.2	30	11	6.5	59	21 800	34 080	19 800	19 580	5 800	42.7



Rodamiento de agujas NKX30

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	42
C - Espesor (mm)	30
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NKX
Unidad de venta	pieza

