


Rodamiento de agujas NKX50

NKX50



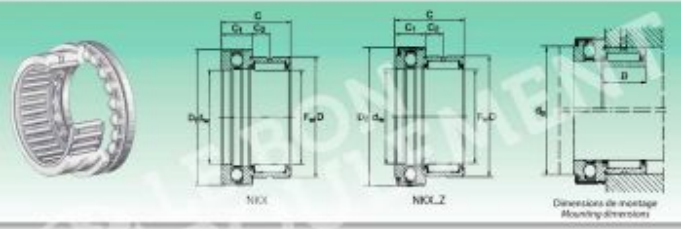

Diamètre interne Shaft diameter (mm)	Série (Designation)		Dimensions (mm) Dimensions (mm)								Coefficients de charge (N) Load rating (N)				Vitesse limite Limiting speed			
	Sans cage ou High load with cage cup	Avec cage With cage Bright (g) 100H polished cup	F _w	D	D ₁ max	C	C ₁	C ₂	d _h	Radial / Din / Din L	Radial / Radial / Din / Din C	Radial / Radial / Din / Din C	Radial / Radial / Din / Din C	St. (mm/min) max (gpm)	n _{lim} (min)			
50	NKX 50	200	NKX 50 Z	180	90	62	15.2	71.3	35	14	10	50	56 800	72 000	28 800	72 000	1 300	65.5



Rodamiento de agujas NKX50

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	62
C - Espesor (mm)	35
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NKX
Unidad de venta	pieza

