


Rodamiento de agujas NKXR30

NKXR30



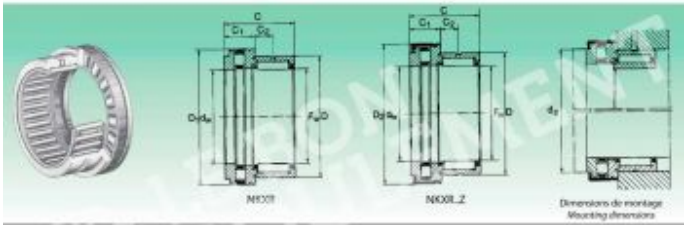

Diamètre extérieur (mm) Outer diameter (mm)	Série (Designation)		Poids Weight (g)	Avec calotte With crowning cap	Poids Weight (g)	Fw	Dimensions (mm) Dimensions (mm)							Coefficients de charge (N) Load factor ratings (N)				Vitesse limite Limiting speed	Remarque Remarks
	Designation	Weight (g)					D	D1	D2	C	C1	C2	d	d1	d2	Radial / Radial	axial / Axial		
30	NKXR30	125	NKXR30.Z	141	88	43	67.1	68.2	80	11	9.5	80	21 000	34 000	34 500	85 000	7 100	42.3	



Rodamiento de agujas NKXR30

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	42
C - Espesor (mm)	30
Marca	Genérica alta calidad
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NKXR
Unidad de venta	pieza

