


Rodamiento de agujas NKX12-T2-Z-NTN

NKX12-T2-Z-NTN

LE BON ROULEMENT

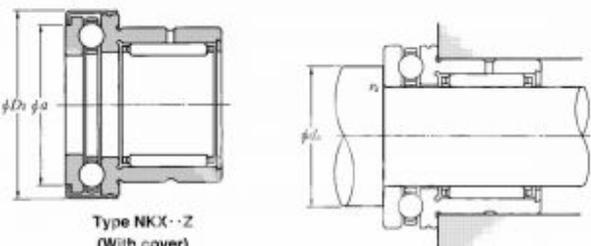

Type NKX-Z
(With cover)

Dimensions											Basic load ratings			
d_1	d	D	B	D_1	r_1	r_2	r_3	r_4	r_5	r_6	Dynamic N	Static N _{st}	Dynamic kg	Static kg _{st}
12	12	22	21	26	0.2	0.2	0.2	0.2	0.2	0.2	6 000	7 700	615	793

dynamic N	Basic load ratings		Limiting dimensions mm	Bearing numbers		Abutment diameters mm	Mass (approx.) kg			
	static	dynamic		Type NKX	Type NKX-Z		Type NKX	Type NKX-Z		
6 000	15 400	1 050	8 400	9 200	NKX12T2	NKX12TZ	20	0.3	0.042	0.044



Rodamiento de agujas NKX12-T2-Z-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	21
C - Espesor (mm)	23
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con grasa
Rodamiento serie	NKX
Unidad de venta	pieza

