


Rodamiento de agujas NKX15-T2-NTN

NKX15-T2-NTN

LE BON ROULEMENT

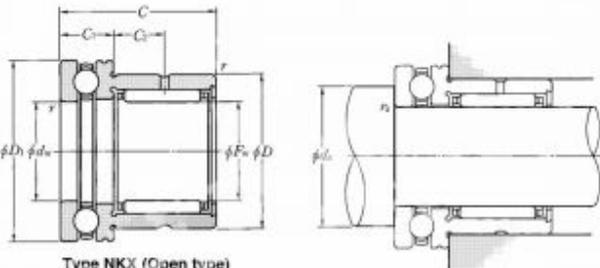

Type NKX (Open type)

Standard dimensions											Basic load ratings			
d_w	d	D	B	D_2	d_2	C_1	C_2	r	r_1	r_2	Dynamic N	Static C ₀	Dynamic N	Static C ₀
15	15	24	24	28	20	23	9	0.5	0.37	0.3	8 250	10 200	840	1 040

dynamic N	Basic load ratings static		dynamic N	static C ₀	Limiting dimensions mm		Bearing numbers		Abutment dimensions mm		Mass (approx.) kg	
	C ₀	C ₀			gross	oil	Type NKX	Type NKX-2	d ₁ min	d ₂ max	Type NKX	Type NKX-2
8 250	16 000	1 070	1 710	8 200	8 800	NKX15T2	NKX15T2Z	23	0.3	0.044	0.048	



Rodamiento de agujas NKX15-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	15
D - Diámetro exterior (mm)	24
C - Espesor (mm)	23
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con aceite
Rodamiento serie	NKX
Unidad de venta	pieza

