


Rodamiento de agujas NKXR20-T2-NTN

NKXR20-T2-NTN

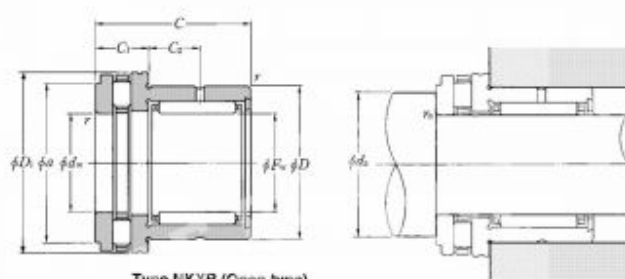

Type NKXR (Open type)

Boundary dimensions											Basic load ratings			
r_1	r_2	d_1	d_2	d	d_1	d_2	d	d_1	d_2	d	dynamic	static	dynamic	static
25	20	20	30	25	36	30	10	10.5	20.7	0.3	16 400	27 100	1 670	2 780

Basic load ratings				Limiting dimensions		Bearing numbers		Mounting dimensions		Mass	
dynamic	static	dynamic	static	gross	oil	Type NKXR	Type NKXR-2	d_1	d_2	Type NKXR	Type NKXR-2
20 200	48 500	2 090	4 790	2 100	8 500	NKXR20T2	NKXR20T2Z	20	0.3	0.090	0.065



Rodamiento de agujas NKXR20-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	30
C - Espesor (mm)	30
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con aceite
Rodamiento serie	NKXR
Unidad de venta	pieza

