


Rodamiento de agujas NKXR25-T2-NTN

NKXR25-T2-NTN

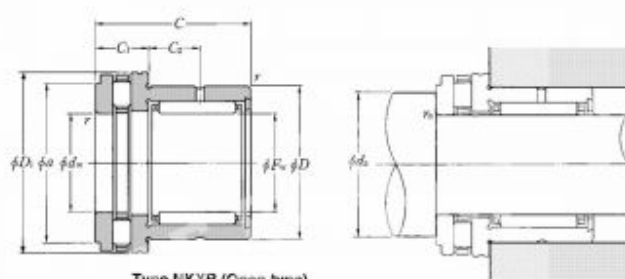

Type NKXR (Open type)

Boundary dimensions											Basic load ratings			
d	d_1	d_2	d_3	d_4	d_5	d_6	d_7	d_8	d_9	d_{10}	dynamic N	static N	dynamic kgf	static kgf
25	25	25	25	25	25	25	25	25	25	25	14 200	24 900	1 450	2 430

Basic load ratings				Limiting dimensions		Bearing numbers		Abutment dimensions		Mass	
dynamic N	static N	dynamic kgf	static kgf	gross	net	Type NKXR	Type NKXR-2	d_1	d_2	Type NKXR	Type NKXR-2
27 300	88 000	2 790	6 930	1 600	7 000	NKXR25T2	NKXR25T2Z	25	0.6	0.128	0.135



Rodamiento de agujas NKXR25-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	37
C - Espesor (mm)	30
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con aceite
Rodamiento serie	NKXR
Unidad de venta	pieza

