


Rodamiento de agujas NKXR25-T2-Z-NTN

NKXR25-T2-Z-NTN

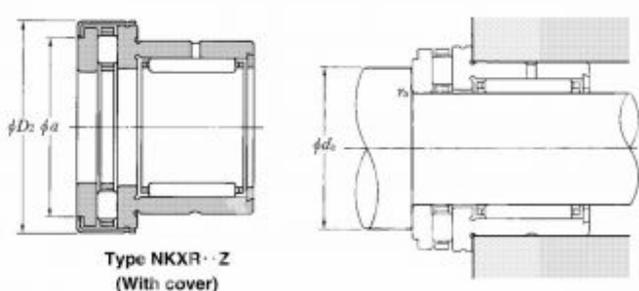

LE BON ROULEMENT

Type NKXR · Z
(With cover)

Boundary dimensions										Basic load ratings			
d	D	d_1	D_1	d_2	D_2	d_3	D_3	r	r_1	Dynamic	Static	Dynamic	Static
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	N	kgf	N	kgf
25	42	25	42	25	42	25	42	0.5	0.8	14 200	24 900	1 450	2 430

Basic load ratings		Limiting dimensions		Bearing numbers		Mounting dimensions		Mass	
Dynamic	Static	gross	of	Type NKXR	Type NKXR · Z	d_1	r_1	Type NKXR	Type NKXR · Z
N	kgf	mm	mm			mm	mm	kg	kg
27 300	88 000	2 700	6 900	NKXR25T2	NKXR25T2Z	25	0.8	0.128	0.135



Rodamiento de agujas NKXR25-T2-Z-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	37
C - Espesor (mm)	30
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con grasa
Rodamiento serie	NKXR
Unidad de venta	pieza

