


Rodamiento de agujas NKXR40-T2-NTN

NKXR40-T2-NTN

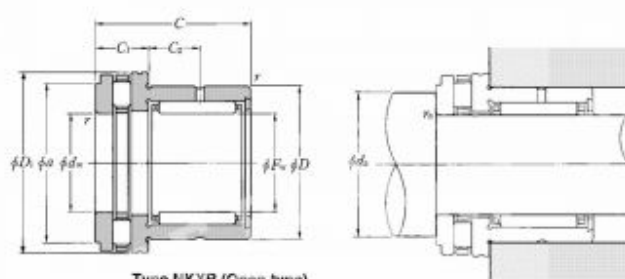

Type NKXR (Open type)

Boundary dimensions														Basic load ratings			
r_1	r_2	d_1	d_2	d_3	d_4	d_5	d_6	d_7	d_8	d_9	d_{10}	d_{11}	d_{12}	dynamic N	static N	dynamic kgf	static kgf
40	40	40	40	52	60	61	32	13	10	55.7	0.6	25 900	52 900	2 660	5 390		

Basic load ratings				Limiting dimensions		Bearing numbers		Abutment dimensions		Mass	
dynamic N	static N	dynamic kgf	static kgf	gross	of	Type NKXR	Type NKXR-2	d_1 mm	d_2 mm	Type NKXR	Type NKXR-2
40 000	121 000	4 350	12 430	1 200	4 800	NKXR40T2	NKXR40T2Z	56	0.6	0.226	0.237



Rodamiento de agujas NKXR40-T2-NTN

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	52
C - Espesor (mm)	32
Marca	NTN
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Poliamido
Especificaciones	Lubricación con aceite
Rodamiento serie	NKXR
Unidad de venta	pieza

