


Rodamiento de agujas NAX1725-IKO

NAX1725-IKO

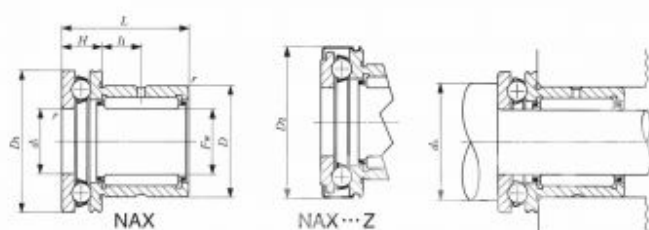

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
17	NAX 1725	54	NAX 1725Z	56	NBX 1725	61	NBX 1725Z	63

Boundary dimensions mm										Permissible shaft stress d_a N/mm ²	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm
F_a	D	D_1	D_2	L	H	i_1	i_2	$r_{s,max}$	d_1		Radial	Axial	Radial	Axial	
17	26	30	31	25	8	8	0.3	17	25	25	12 900	10 800	16 300	14 500	8 500
17	26	30	31	25	9	8	0.3	17	28	28	12 900	11 400	16 300	28 600	13 000



Rodamiento de agujas NAX1725-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	17
D - Diámetro exterior (mm)	26
C - Espesor (mm)	25
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAX
Unidad de venta	pieza

