


Rodamiento de agujas NAX2030-Z-IKO

NAX2030-Z-IKO

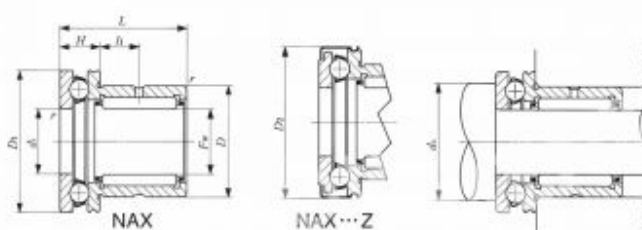

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
20	NAX 2030	85.5	NAX 2030Z	89	NBX 2030	94	NBX 2030Z	97.5

Boundary dimensions mm										Displacement range d_A mm	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm
F_a	D	D_1	D_2	L	H	i_1	i_2	r_{max}	d_1		Radial N	Axial N	Radial N	Axial N	
20	30	35	36	30	10	10.5	0.3	20	29	17 600	14 200	25 400	19 700	7 500	
20	30	35	36	30	10	10.5	0.3	20	33	17 600	19 000	25 400	48 700	11 000	



Rodamiento de agujas NAX2030-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	30
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NAX
Unidad de venta	pieza

