


Rodamiento de agujas NAX2530-IKO

NAX2530-IKO

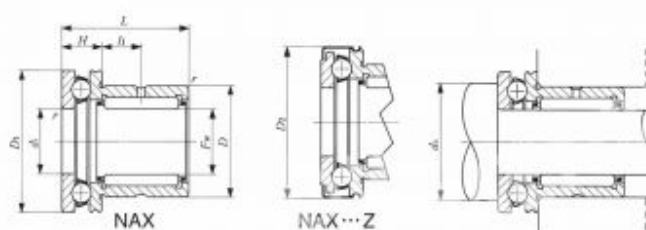

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
25	NAX 2530	131	NAX 2530Z	135	NBX 2530	143	NBX 2530Z	147

Boundary dimensions mm										Permissible displacement d_{sa} mm	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm
F_a	D	D_1	D_2	L	H	i_1	i_2	r_{max}	d_1		Radial N	Axial N	Radial N	Axial N	
25	37	42	43	30	11	9.5	0.6	25	35	20 000	19 600	32 100	29 700	7 000	
25	37	42	43	30	11	9.5	0.6	25	40	20 000	22 700	32 100	60 700	9 000	



Rodamiento de agujas NAX2530-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	37
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAX
Unidad de venta	pieza

