


Rodamiento de agujas NAX3030-Z-IKO

NAX3030-Z-IKO

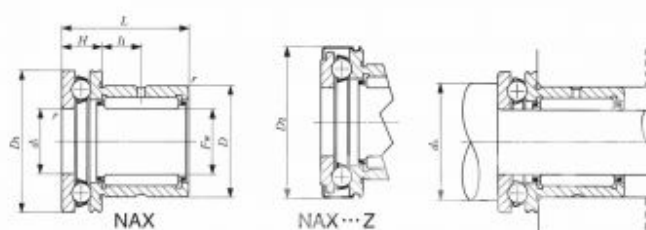

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
30	NAX 3030	145	NAX 3030Z	151	NBX 3030	160	NBX 3030Z	166

Boundary dimensions mm										Permissible displacement d_{sa} mm	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm
F_w	D	D_1	D_2	L	H	i_1	i_2	r_{max}	d_1		Radial N	Axial N	Radial N	Axial N	
30	42	47	48	30	11	9.5	0.6	30	40	25 100	20 400	40 100	33 600	6 500	
30	42	47	48	30	11	9.5	0.6	30	45	25 100	27 400	40 100	81 000	8 000	



Rodamiento de agujas NAX3030-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	42
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NAX
Unidad de venta	pieza

