


Rodamiento de agujas NAX3530-Z-IKO

NAX3530-Z-IKO

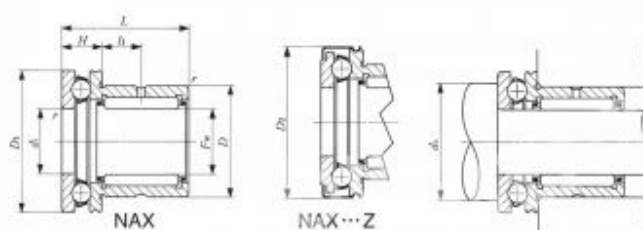

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
35	NAX 3530	169	NAX 3530Z	176	NBX 3530	186	NBX 3530Z	193

Boundary dimensions mm										Permissible displacement d _{sh} mm	Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	i ₂	r _{max}	d ₁		Radial	Axial	Radial	Axial	
35	47	52	53	30	12	9	9	0.6	35	45	26 900	21 200	46 200	37 600	6 000
35	47	52	53	30	12	9	9	0.6	35	50	26 900	28 100	46 200	81 100	7 000



Rodamiento de agujas NAX3530-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	47
C - Espesor (mm)	30
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NAX
Unidad de venta	pieza

