


Rodamiento de agujas NAX4032-Z-IKO

NAX4032-Z-IKO

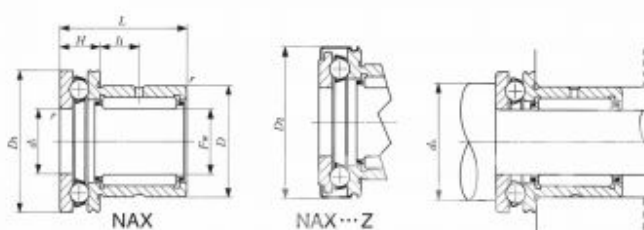

Identification number							
Shaft dia. mm		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover
40	NAX 4032	219	NAX 4032Z	227	NBX 4032	240	NBX 4032Z
		—		—		248	

Boundary dimensions mm										Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	r _{max}	d ₁	d ₂	Radial	Axial	Radial	Axial	
40	52	60	61	32	13	10	0.6	40	52	29 400	26 800	54 100	50 000	5 500
40	52	60	61	32	13	10	0.6	40	57	29 400	41 700	54 100	133 000	6 000



Rodamiento de agujas NAX4032-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	52
C - Espesor (mm)	32
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NAX
Unidad de venta	pieza

