


Rodamiento de agujas NAX4532-IKO

NAX4532-IKO

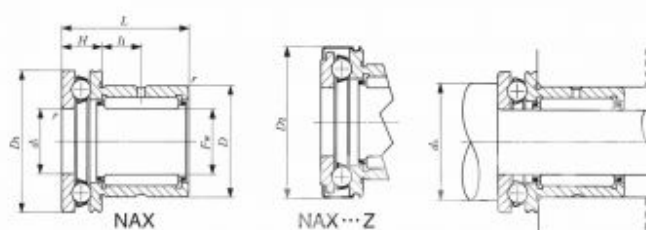

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
45	NAX 4532	264	NAX 4532Z	273	NBX 4532	293	NBX 4532Z	302

Boundary dimensions mm									Permissible displacement d_{sh} mm	Basic dynamic load rating C		Basic static load rating C_0		Allowable rotational speed rpm
F_R	D	D_1	D_2	L	H	i_1	r_{max}	d_1		Radial N	Axial N	Radial N	Axial N	
45	58	65	66.5	32	14	9	0.6	45	57	31 000	27 900	60 200	55 100	5 000
45	58	65	66.5	32	14	9	0.6	45	62	31 000	40 800	60 200	133 000	5 500



Rodamiento de agujas NAX4532-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	45
D - Diámetro exterior (mm)	58
C - Espesor (mm)	32
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con aceite
Rodamiento serie	NAX
Unidad de venta	pieza

