


Rodamiento de agujas NAX5035-Z-IKO

NAX5035-Z-IKO

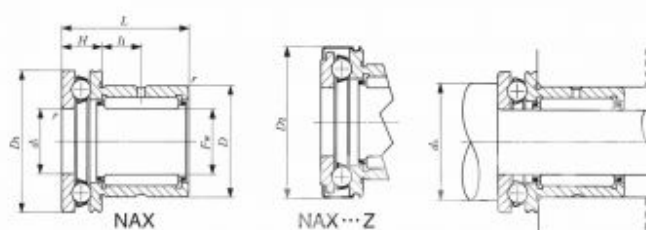

Shaft dia. mm	Identification number							
		Mass (Ref.) g	With dust cover	Mass (Ref.) g		Mass (Ref.) g	With dust cover	Mass (Ref.) g
50	NAX 5035	287	NAX 5035Z	297	NBX 5035	315	NBX 5035Z	325

Boundary dimensions mm										Permissible displacement d _{sh} mm	Basic dynamic load rating C		Basic static load rating C ₀		Allowable rotational speed rpm
F _a	D	D ₁	D ₂	L	H	i ₁	i ₂	r _{max}	d ₁		Radial	Axial	Radial	Axial	
50	62	70	71.5	35	14	10	0.6	0.8	50	62	42 200	28 800	83 400	60 100	4 500
50	62	70	71.5	35	14	10	0.6	0.8	50	67	42 200	43 300	83 400	148 000	5 000



Rodamiento de agujas NAX5035-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	62
C - Espesor (mm)	35
Marca	IKO
Tipo del rodamiento	De agujas combinadas
Tipo de jaula	Acero
Especificaciones	Lubricación con grasa
Rodamiento serie	NAX
Unidad de venta	pieza

