


# Rodamiento de agujas NAX6040-Z-IKO

## NAX6040-Z-IKO

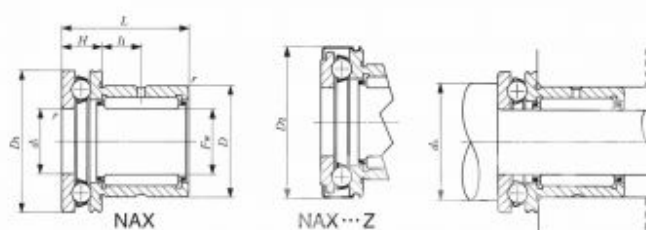

| Identification number |          |                     |                 |                     |          |                     |                 |
|-----------------------|----------|---------------------|-----------------|---------------------|----------|---------------------|-----------------|
| Shaft dia.<br>mm      |          | Mass<br>(Ref.)<br>g | With dust cover | Mass<br>(Ref.)<br>g |          | Mass<br>(Ref.)<br>g | With dust cover |
| 60                    | NAX 6040 | 417                 | NAX 6040Z       | 454                 | NBX 6040 | 501                 | NBX 6040Z       |
|                       |          |                     |                 |                     |          |                     | 538             |

| Boundary dimensions<br>mm |    |                |                |    |    |                |                |                |                | Permissible<br>displacement<br>d <sub>sa</sub><br>mm |        | Basic dynamic load rating<br>C |         | Basic static load rating<br>C <sub>0</sub> |       | Allowable<br>rotational<br>speed |
|---------------------------|----|----------------|----------------|----|----|----------------|----------------|----------------|----------------|------------------------------------------------------|--------|--------------------------------|---------|--------------------------------------------|-------|----------------------------------|
| F <sub>a</sub>            | D  | D <sub>1</sub> | D <sub>2</sub> | L  | H  | i <sub>1</sub> | i <sub>2</sub> | i <sub>3</sub> | i <sub>4</sub> | Min.                                                 | Max.   | Radial                         | Axial   | Radial                                     | Axial | rpm                              |
| 60                        | 72 | 85             | 86.5           | 40 | 17 | 12             | 1              | 60             | 75             | 47 500                                               | 41 400 | 103 000                        | 89 700  | 4 000                                      | 4 000 |                                  |
| 60                        | 72 | 85             | 86.5           | 40 | 17 | 12             | 1              | 60             | 82             | 47 500                                               | 64 600 | 103 000                        | 224 000 | 4 000                                      | 4 000 |                                  |



**Rodamiento de agujas NAX6040-Z-IKO**

| Caractéristique            | Valeur                |
|----------------------------|-----------------------|
| d - Diámetro interior (mm) | 60                    |
| D - Diámetro exterior (mm) | 72                    |
| C - Espesor (mm)           | 40                    |
| Marca                      | IKO                   |
| Tipo del rodamiento        | De agujas combinadas  |
| Tipo de jaula              | Acero                 |
| Especificaciones           | Lubricación con grasa |
| Rodamiento serie           | NAX                   |
| Unidad de venta            | pieza                 |

